



US009914063B1

(12) **United States Patent**  
**McCoskery**

(10) **Patent No.:** **US 9,914,063 B1**  
(45) **Date of Patent:** **Mar. 13, 2018**

(54) **TOY DESIGNED TO SPIN IN A USER'S HAND**

USPC ..... 473/569, 588; 446/233, 236, 250, 256  
See application file for complete search history.

(71) Applicant: **Michael Scott McCoskery**, Suquamish, WA (US)

(56) **References Cited**

(72) Inventor: **Michael Scott McCoskery**, Suquamish, WA (US)

U.S. PATENT DOCUMENTS

(73) Assignee: **MD INTELLECTUAL HOLDINGS LLC**, Bainbridge Island, WA (US)

476,825	A *	6/1892	Schwartz	.....	A63B 67/086
					446/240
547,764	A *	10/1895	Boyum	.....	A63F 9/16
					273/147
1,548,646	A *	8/1925	Akeson	.....	A44C 9/00
					428/11
2,454,492	A *	11/1948	Turnbull	.....	A63B 67/14
					473/587
2,564,053	A *	8/1951	Donovan	.....	A63H 1/00
					446/40
2,879,066	A *	3/1959	Sutherland	.....	A63F 9/16
					273/147
3,081,578	A *	3/1963	Mosher	.....	A63H 1/30
					446/216
3,206,210	A *	9/1965	Bard	.....	A63F 7/40
					473/588
3,287,846	A *	11/1966	Frangos	.....	A63H 1/00
					446/235

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **15/592,894**

(22) Filed: **May 11, 2017**

**Related U.S. Application Data**

(60) Provisional application No. 62/334,879, filed on May 11, 2016.

(51) **Int. Cl.**  
**A63H 1/00** (2006.01)  
**A63B 67/14** (2006.01)  
**A63H 33/00** (2006.01)  
**A63H 29/08** (2006.01)  
**A63H 1/30** (2006.01)  
**A63F 9/16** (2006.01)

(52) **U.S. Cl.**  
CPC ..... **A63H 33/00** (2013.01); **A63B 67/14** (2013.01); **A63F 9/16** (2013.01); **A63H 1/00** (2013.01); **A63H 1/30** (2013.01); **A63H 29/08** (2013.01); **A63B 2067/146** (2013.01); **A63B 2208/12** (2013.01)

(58) **Field of Classification Search**  
CPC ..... A63B 67/14; A63B 2208/12; A63B 2067/146; A63H 1/00; A63H 1/30; A63F 9/16


(Continued)

*Primary Examiner* — Alexander Niconovich  
(74) *Attorney, Agent, or Firm* — Plager Schack LLP

(57) **ABSTRACT**

A device designed to spin in a user's hands may include a body with a centrally mounted ball bearing positioned within a center orifice of the body, wherein an outer race of the ball bearing is attached to the frame; a button made of a pair of bearing caps attached to one another through the ball bearing and clamped against an inner race of the ball bearing, such that when the button is held between a user's thumb and finger, the body freely rotates about the ball bearing; and a plurality of weights distributed at opposite ends of the body, creating at least a bipolar weight distribution.

**14 Claims, 4 Drawing Sheets**

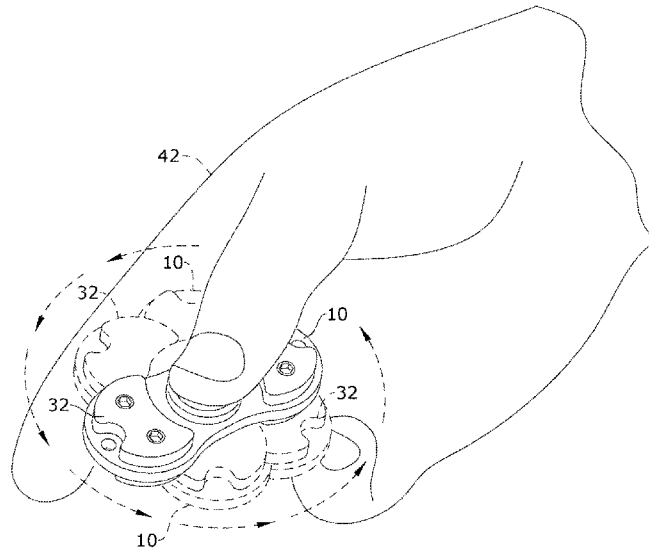

(56)

References Cited

U.S. PATENT DOCUMENTS

3,565,434	A *	2/1971	Liston	.....	A63B 65/08	5,976,042	A *	11/1999	Lamarche	.....	A63B 67/14
					273/DIG. 4						473/588
3,936,974	A *	2/1976	House	.....	A63H 1/00	6,089,998	A *	7/2000	O'Neal	.....	A63B 67/14
					446/250						473/588
3,959,989	A *	6/1976	Bhandia	.....	A44C 9/02	6,167,726	B1 *	1/2001	Kremer	.....	A44C 9/00
					446/244						63/15
5,020,798	A *	6/1991	Yang	.....	A63H 1/04	6,530,817	B1 *	3/2003	Winslow	.....	A63H 1/00
					273/440						446/256
5,135,425	A *	8/1992	Andrews	.....	A63H 33/26	6,592,476	B1 *	7/2003	Bellehumeur	.....	A63B 67/14
					335/306						473/588
5,275,410	A *	1/1994	Bellehumeur	.....	A63B 67/14	7,018,263	B2 *	3/2006	Tiefel	.....	A63H 1/06
					473/588						2/20
5,284,343	A *	2/1994	Bigornia	.....	A63B 21/0603	7,740,518	B2 *	6/2010	Elliott	.....	A63F 9/16
					473/446						273/126 R
5,318,293	A *	6/1994	Nathanson	.....	A63H 1/00	7,874,890	B2 *	1/2011	Van Dan Elzen	.....	A63H 1/30
					446/236						446/247
5,490,678	A *	2/1996	Darnell	.....	A63B 65/08	8,210,895	B2 *	7/2012	Bertrand	.....	A63F 9/16
					473/590						446/259
5,591,062	A *	1/1997	Hettinger	.....	A63B 67/086	8,851,954	B2 *	10/2014	McCafferty	.....	A63H 1/30
					446/240						446/250
5,718,648	A *	2/1998	La Savio	.....	A63B 67/14	9,302,195	B2 *	4/2016	Paul	.....	A63H 33/002
					473/588	2005/0064967	A1 *	3/2005	Coleman	.....	A63B 67/14
5,733,213	A *	3/1998	Colarusso	.....	A63B 67/14						473/588
					473/588	2015/0140894	A1 *	5/2015	Robustelli	.....	A63H 1/30
											446/233
						2017/0326468	A1 *	11/2017	Kinmont, Jr.	.....	A63H 33/26

\* cited by examiner

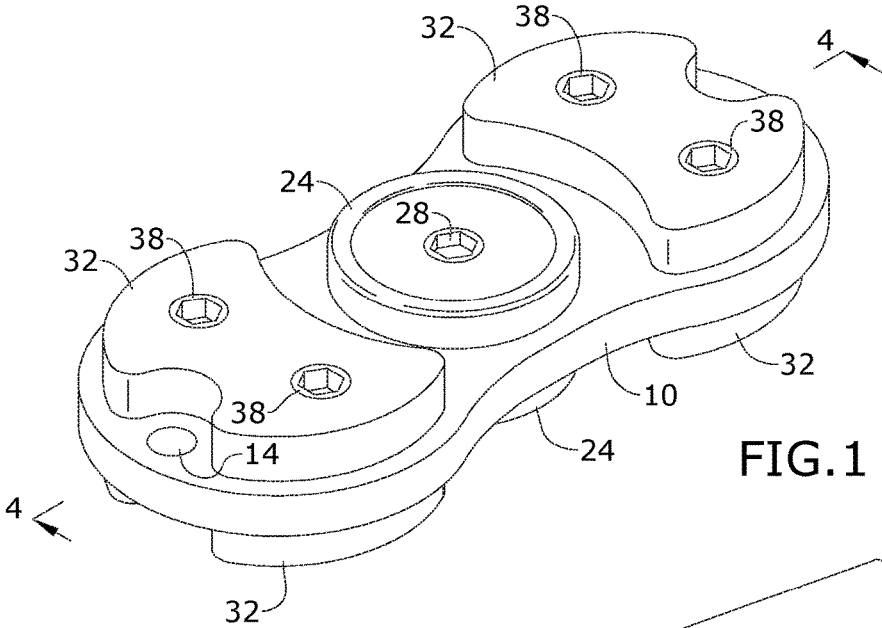


FIG. 1

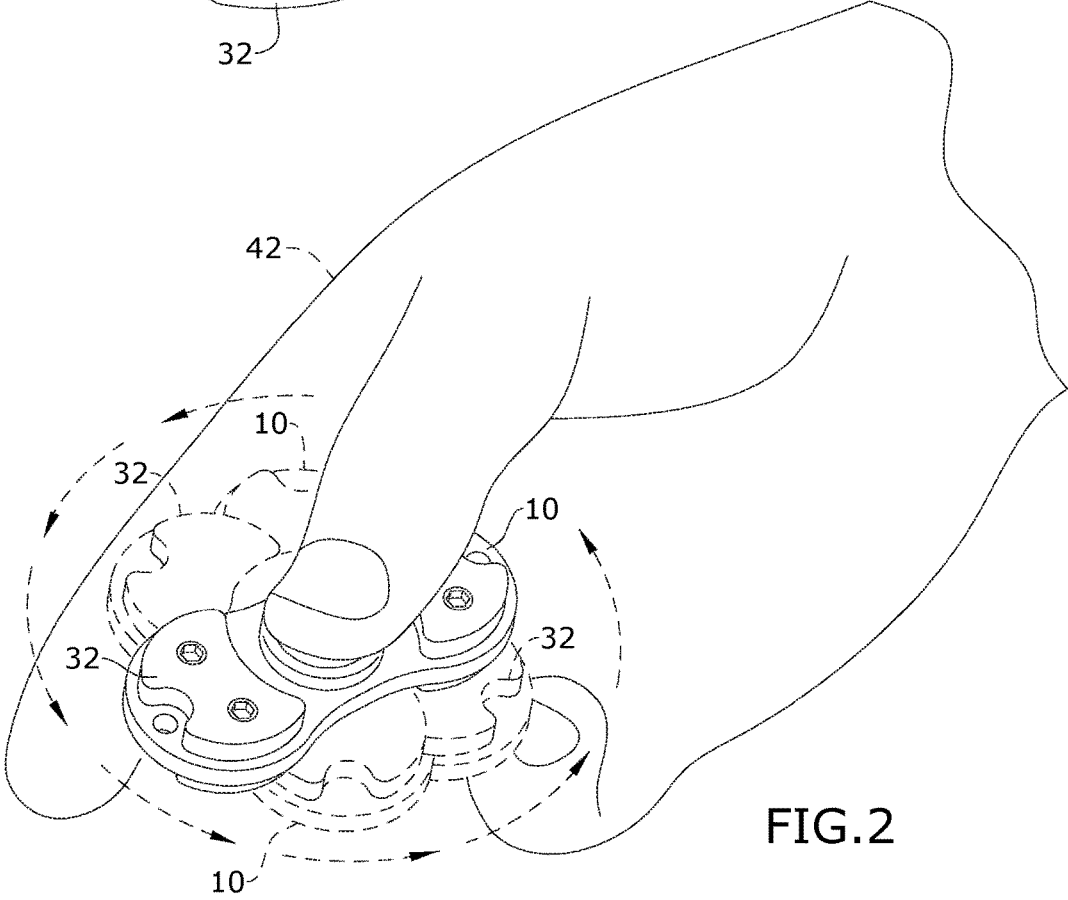


FIG. 2

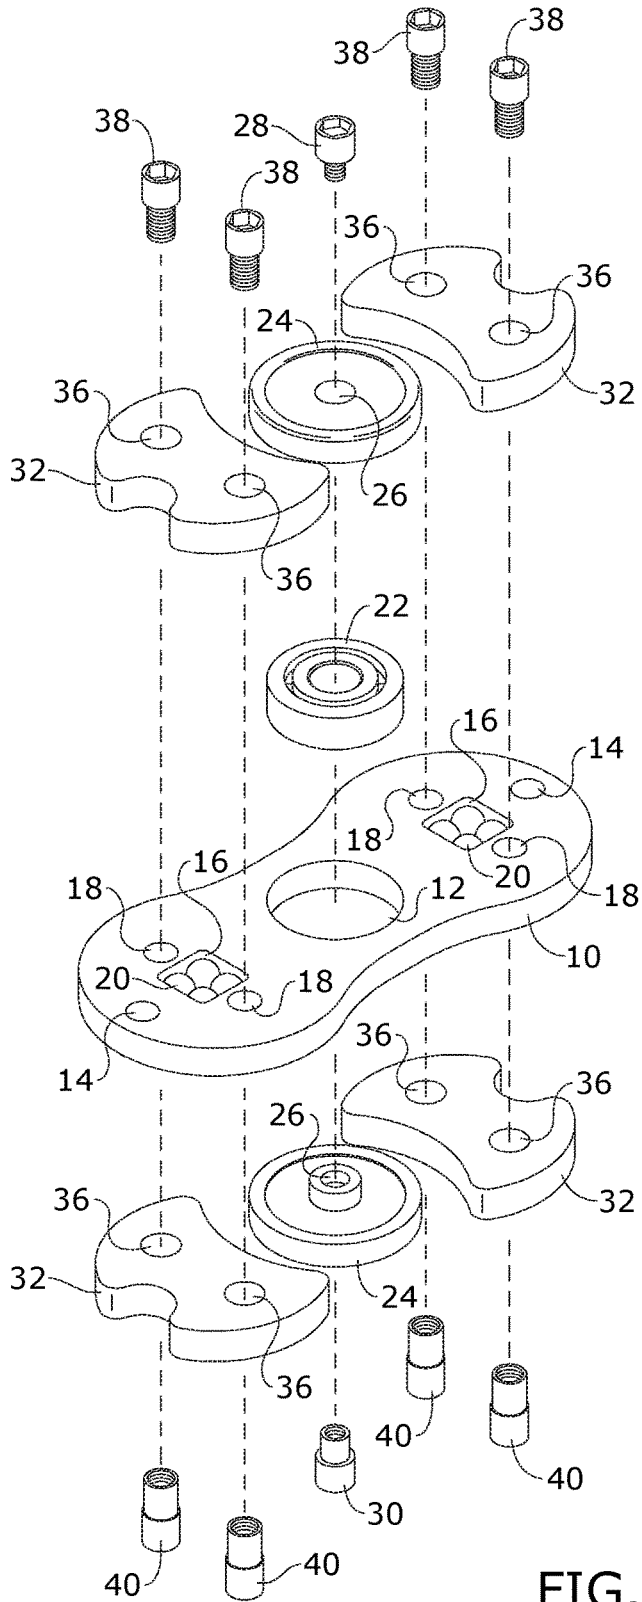


FIG. 3

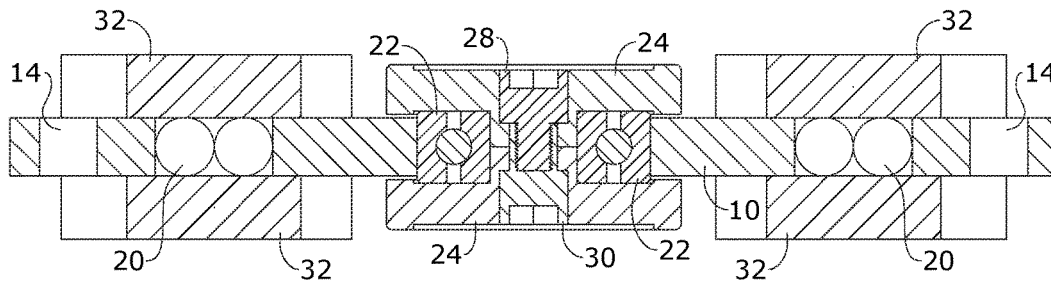


FIG. 4

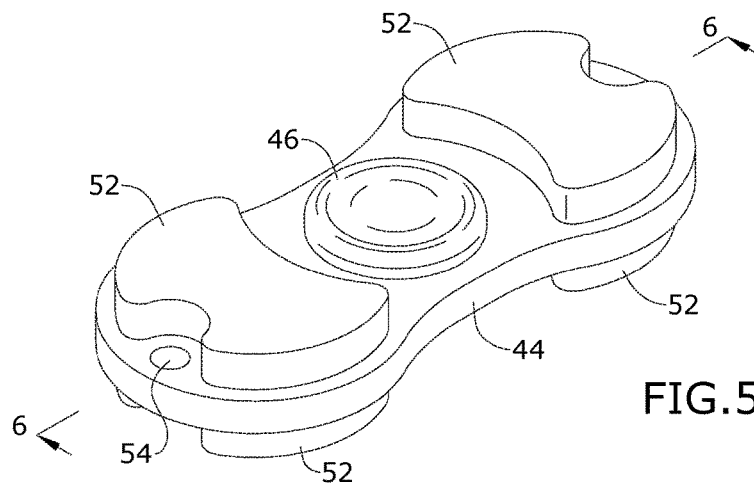


FIG. 5

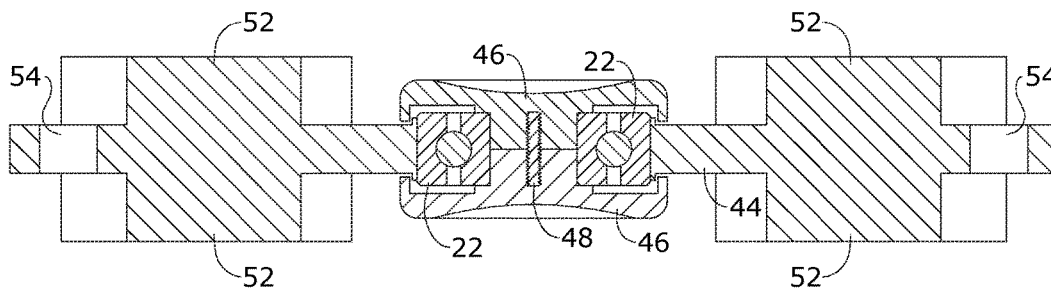


FIG. 6

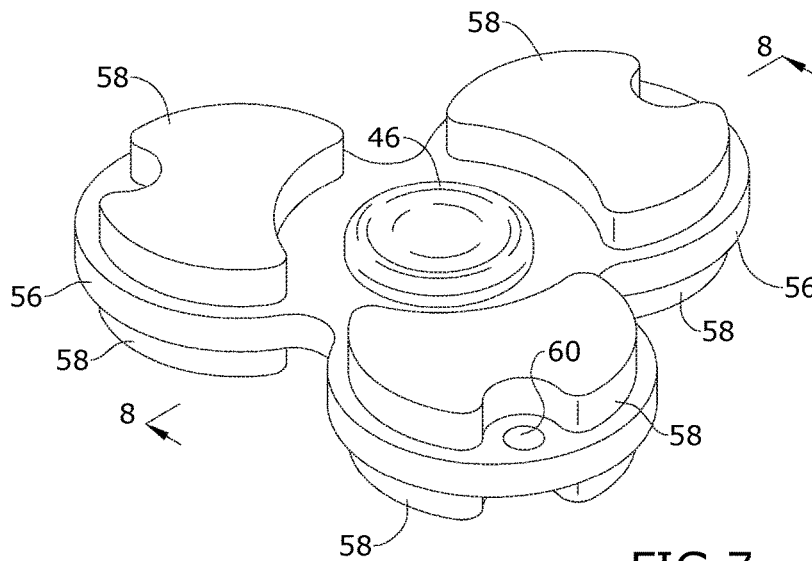


FIG. 7

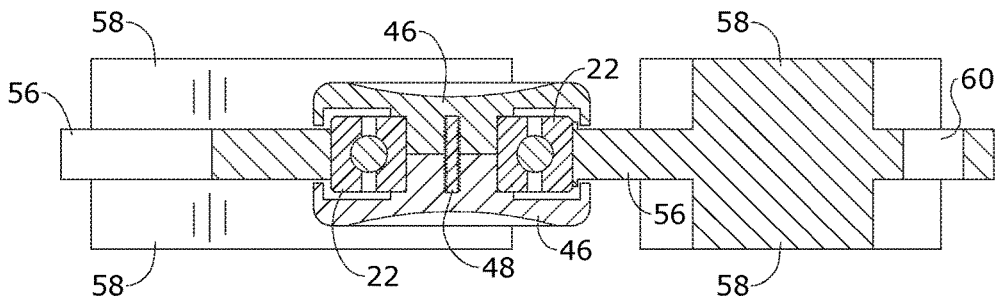


FIG. 8

## TOY DESIGNED TO SPIN IN A USER'S HAND

### RELATED APPLICATION

This application claims priority to provisional patent application U.S. Ser. No. 62/334,879 filed on May 11, 2016 entire contents of which is herein incorporated by reference.

### BACKGROUND

The embodiments herein relate generally to toys, and more particularly, to a fidget toy or cessation device configured to spin in a user's hands.

Many people like to keep their hands busy by playing with coins, pens, lighters, knives, fidget toys, or the like. Flipping and spinning things around in one's hand may be a calming activity, and many people use these types of devices as cessation devices or to relieve anxiety. Alternatively, some people enjoy using the devices solely for fun.

Therefore, what is needed is a fidget toy designed to be spun between a user's fingers.

### SUMMARY

Some embodiments of the present disclosure include a device designed to spin in a user's hands. The device may comprise a body with a centrally mounted ball bearing positioned within a center orifice of the body, wherein an outer race of the ball bearing is attached to the frame; a button made of a pair of bearing caps attached to one another through the ball bearing and clamped against an inner race of the ball bearing, such that when the button is held between a user's thumb and finger, the body freely rotates about the ball bearing; and a plurality of weights distributed at opposite ends of the body, creating at least a bipolar weight distribution

### BRIEF DESCRIPTION OF THE FIGURES

The detailed description of some embodiments of the invention is made below with reference to the accompanying figures, wherein like numerals represent corresponding parts of the figures.

FIG. 1 is a perspective view of one embodiment of the present disclosure.

FIG. 2 is a perspective view of one embodiment of the present disclosure.

FIG. 3 is an exploded view of one embodiment of the present disclosure.

FIG. 4 is a section view of one embodiment of the present disclosure, taken along line 4-4 in FIG. 1.

FIG. 5 is a perspective view of one embodiment of the present disclosure.

FIG. 6 is a section view of one embodiment of the present disclosure, taken along line 6-6 in FIG. 5.

FIG. 7 is a perspective view of one embodiment of the present disclosure.

FIG. 8 is a section view of one embodiment of the present disclosure, taken along line 8-8 in FIG. 7.

### DETAILED DESCRIPTION OF CERTAIN EMBODIMENTS

In the following detailed description of the invention, numerous details, examples, and embodiments of the invention are described. However, it will be clear and apparent to

one skilled in the art that the invention is not limited to the embodiments set forth and that the invention can be adapted for any of several applications.

The device of the present disclosure may be used as a fidget toy or a cessation device and may comprise the following elements. This list of possible constituent elements is intended to be exemplary only, and it is not intended that this list be used to limit the device of the present application to just these elements. Persons having ordinary skill in the art relevant to the present disclosure may understand there to be equivalent elements that may be substituted within the present disclosure without changing the essential function or operation of the device.

1. Body
2. Ball Bearing
3. Bearing Cap
4. Weights
5. Balancing Mass

The various elements of the device of the present disclosure may be related in the following exemplary fashion. It is not intended to limit the scope or nature of the relationships between the various elements and the following examples are presented as illustrative examples only.

By way of example, and referring to FIGS. 1-6, some embodiments of the present disclosure include a device designed to spin in a user's hands, the device comprising a body **10** with a centrally mounted ball bearing **22** positioned within a center orifice **12**, wherein an outer race of the ball bearing **22** is attached to the frame **10**; a button comprising a pair of bearing caps **24** attached to one another through the ball bearing **22** and clamped against an inner race of the ball bearing **22**, such that when the button is held between a user's thumb and finger, the body **10** freely rotates about the ball bearing **22**; and a plurality of weights distributed at opposite ends of the body **10**, creating at least a bipolar weight distribution, which may increase inertia to give the device balance and the ability to spin for a lengthened period of time.

In some embodiments, such as those shown in FIGS. 1-4, the weights **32** may sandwich each end of the body **10**, wherein the weights **32** each comprise at least one weight orifice **36**, and the body **10** comprises at least one weight mounting orifice **18** designed to align with the at least one weight orifice **36**. The weights **32** may be attached to the body **10** by a fastener designed to extend through the weight orifice **36** and the weight mounting orifice **18**. For example, a male threaded weight binding screw **38** may extend from a surface of the weight **32**, through the weight orifice **36**, and into the weight mounting orifice **18**, and a female threaded bolt **40** may extend from a surface of the opposite weight **32**, through the weight orifice **36**, into the weight mounting orifice **18** and engage with the weight binding screw **38** to removably attach weights **32** to the body **10**. In such embodiments, the device may further comprise a slot **16**, such as a square shaped slot, proximate to each end of the body **10**, wherein each slot **16** is sized to accommodate at least one balancing mass, such as a balancing weight ball **20**. The weights **32** may then be attached to the frame **10** on either side of the slot **16** to secure the at least one balancing mass within the slot **16**. Balancing masses may be added to or removed from the slot **16** at the user's discretion to fine tune the balance of the device.

As described above, the button may comprise a pair of bearing caps **24** attached to one another through the bearing **22** and clamped against the inner race of the bearing **22**. In a particular embodiment, each bearing cap **24** may comprise a bearing cap orifice **26** extending through a central point

3

therein, wherein a center bearing screw **18** is designed to extend through one of the bearing caps **24**, through the bearing cap orifice **26** and into the center orifice **12**, and a center bearing bolt **30** is designed to extend through the other bearing cap **24**, through its bearing cap orifice **26**, and into the center orifice **12** to engage with the center bearing screw **18**, removably attaching the button to the inner race of the bearing **22**.

Alternatively and as shown, for example, in FIGS. **5** and **6**, the device may comprise a solid body **44** with built-in, weighted ends **52**. The button may comprise a pair of alternate bearing caps **46**, wherein the bearing caps **46** are attached to one another by a bearing cap post, such as a threaded bearing cap post **48**, wherein the bearing cap post **48** extends through the ball bearing **22** and screwed into each bearing cap **46** to removably attach the bearing caps **46** to one another.

In any embodiment, and as shown in the Figures, the body **10**, **44** may further comprise an orifice **14**, **54** positioned at each end of the body **10**, wherein the orifice **14**, **54** may be sized and designed to engage with, for example, a key chain to allow a user to easily carry the device around. While both the slot **16** and orifice **14**, **54** are optional, in any case, if a slot **16** or an orifice **14**, **54** is included at one end of the body **10**, another slot **16** or orifice **14**, **54** may be positioned at each end of the body **10** to ensure an equal weight distribution.

While it is described above that the weights **32** and bearing caps **24**, **46** may be attached to the body **10** and bearing **22** using screws, bolts, and/or the bearing cap post **48**, any suitable fastener may be used to attach the components to one another.

As shown in FIGS. **1-6**, the body **10** may have a rounded hourglass shape, wherein each end is rounded and the middle area is concave. Thus, some embodiments of the body **10** may have two opposite ends and may thus have a bipolar weight distribution. However, other embodiments of the body **10**, such as that shown in FIGS. **7** and **8**, may have three ends **56**, similar to a three-sided boomerang and may therefore have a tri-polar weight distribution, wherein each of the three ends **56** has an orifice **60** extending there-through, similar to orifices **14**, **54** in the bipolar version. In fact, the device may have as many ends as desired, so long as the weight is evenly distributed. Additionally, the weights **32** may have any desired shape, size, and weight, so long as the weight distribution remains equal on each end of the body **10**. The device may be made of any suitable or desired materials.

To use the device of the present disclosure, a user **42** may grasp the button between the thumb and index or middle finger. The body **10** may then be flicked with the user's other fingers to spin the body **10** freely while holding the button **18**.

Persons of ordinary skill in the art may appreciate that numerous design configurations may be possible to enjoy the functional benefits of the inventive systems. Thus, given the wide variety of configurations and arrangements of embodiments of the present invention the scope of the invention is reflected by the breadth of the claims below rather than narrowed by the embodiments described above.

What is claimed is:

**1.** A device designed to spin in a user's hands, the device comprising:

a planar body with a centrally mounted ball bearing positioned within a center orifice of the planar body, wherein an outer race of the ball bearing is attached to the planar body;

4

a button comprising a pair of bearing caps attached to one another through the ball bearing and clamped against an inner race of the ball bearing, such that when the button is held between a user's thumb and finger, the planar body freely rotates about the ball bearing; and a plurality of weights distributed at opposite ends of the planar body, creating at least a bipolar weight distribution.

**2.** The device of claim **1**, wherein the planar body has a rounded hour glass shape with a bipolar weight distribution.

**3.** The device of claim **1**, wherein:

the plurality of weights comprises two weights sandwiching each end of the planar body;

each weight comprises at least one weight orifice;

the planar body comprises at least one weight mounting orifice on each end designed to align with the at least one weight orifice in each weight; and

a fastener extends through a first weight, through the at least one weight mounting orifice, and the second weight to attach the first weight and the second weight to the planar body.

**4.** The device of claim **3**, wherein the fastener comprises a female threaded bolt designed to engage with a male threaded screw.

**5.** The device of claim **3**, further comprising a slot in each end of the planar body sized to accommodate at least one balancing mass, wherein the slot is positioned between the two weights sandwiching each end.

**6.** The device of claim **1**, wherein:

the pair of bearing caps comprises a first bearing cap and a second bearing cap;

the first bearing cap comprises a first bearing cap orifice and the second bearing cap comprises a second bearing cap orifice;

a center bearing screw extends through the first bearing cap, through the first bearing cap orifice and into the center orifice; and

a center bearing bolt extends through the second bearing cap, through the second bearing cap orifice, and into the center orifice to engage with the center bearing screw.

**7.** The device of claim **1**, wherein the planar body is a solid body and the plurality of weights are built-in to the solid body.

**8.** The device of claim **7**, wherein the pair of bearing caps are attached to one another by a bearing cap post, wherein the bearing cap post extends through the ball bearing and screws into each bearing cap.

**9.** The device of claim **1**, wherein the planar body comprises a member selected from the group consisting of a bi-polar distribution with two weighted ends and a tri-polar distribution with three weighted ends.

**10.** The device of claim **1**, wherein the planar body is hub-and-spoke shaped.

**11.** The device of claim **1**, wherein the planar body is a singular planar body.

**12.** The device of claim **1**, wherein:

each of the plurality of weights is spaced from a center of the planar body towards each end of the planar body; and

a shape of each of the plurality of weights mimics a shape of each end of the planar body.

**13.** A device designed to spin in a user's hands, the device comprising:

a body with a centrally mounted ball bearing positioned within a center orifice of the body, wherein an outer race of the ball bearing is attached to the body;



a button comprising a pair of bearing caps attached to one another through the ball bearing and clamped against an inner race of the ball bearing, such that when the button is held between a user's thumb and finger, the body freely rotates about the ball bearing; and  
a plurality of weights distributed at opposite ends of the body, creating at least a bipolar weight distribution, wherein:  
the body is hub-and-spoke shaped.

14. The device of claim 13, wherein the body has a planar hub-and-spoke shape.

\* \* \* \* \*